

EC 551
Telecommunication System
Engineering

Mohamed Khedr

<http://webmail.aast.edu/~khedr>


Syllabus

- Tentatively

Week 1	Overview
Week 2	Wireless Channel characteristics
Week 3	OFDM and modulation techniques
Week 4	Coding techniques in wireless systems
Week 5	WiMax
Week 6	WiMax Physical Layer
Week 7	WLAN Physical Layer
Week 8	WLAN MAC Layer
Week 9	Cellular Communication Concept
Week 10	FDMA, TDMA, CDMA and Duplexing
Week 11	GSM System
Week 12	GPRS System
Week 13	UMTS
Week 14	IP networks
Week 15	VOIP

Terminologies: BS, MS, Cell, Sector


- Base station (BS)
 - Access point (AP)
- Mobile station (MS)
 - SS (Subscriber station)
 - MT (mobile terminal)
 - MN (mobile node)
- Downlink
 - Forward link
 - BS → MS
- Uplink
 - Reverse link
 - MS → BS
- Cell
 - Coverage area of a BS
- Sector
 - Partial area of a cell that is served by a directional antenna

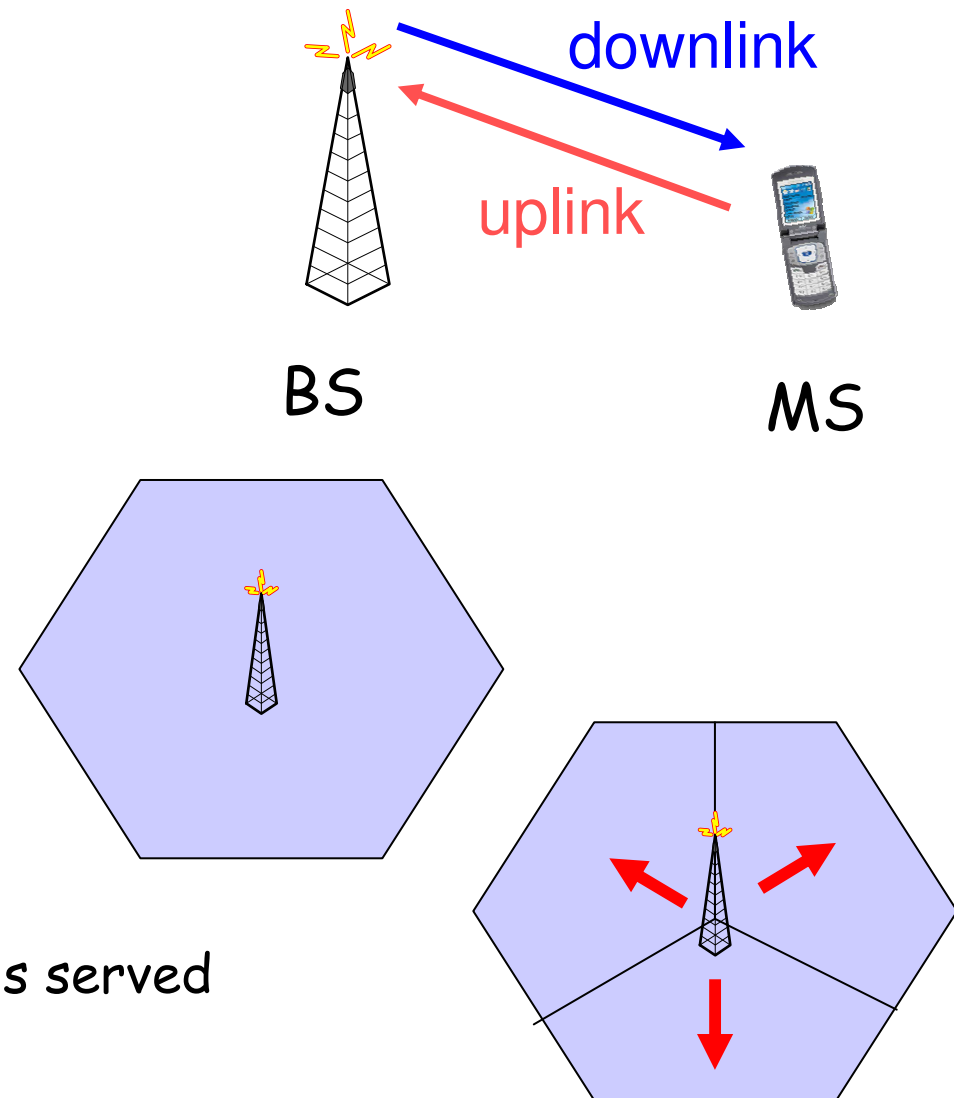

Abstract model for a cellular system


- Components

- Gateway to the wireline system (backhaul)
- Base station (BS)
- Database
- Security
- Air interface
- Cellular phone

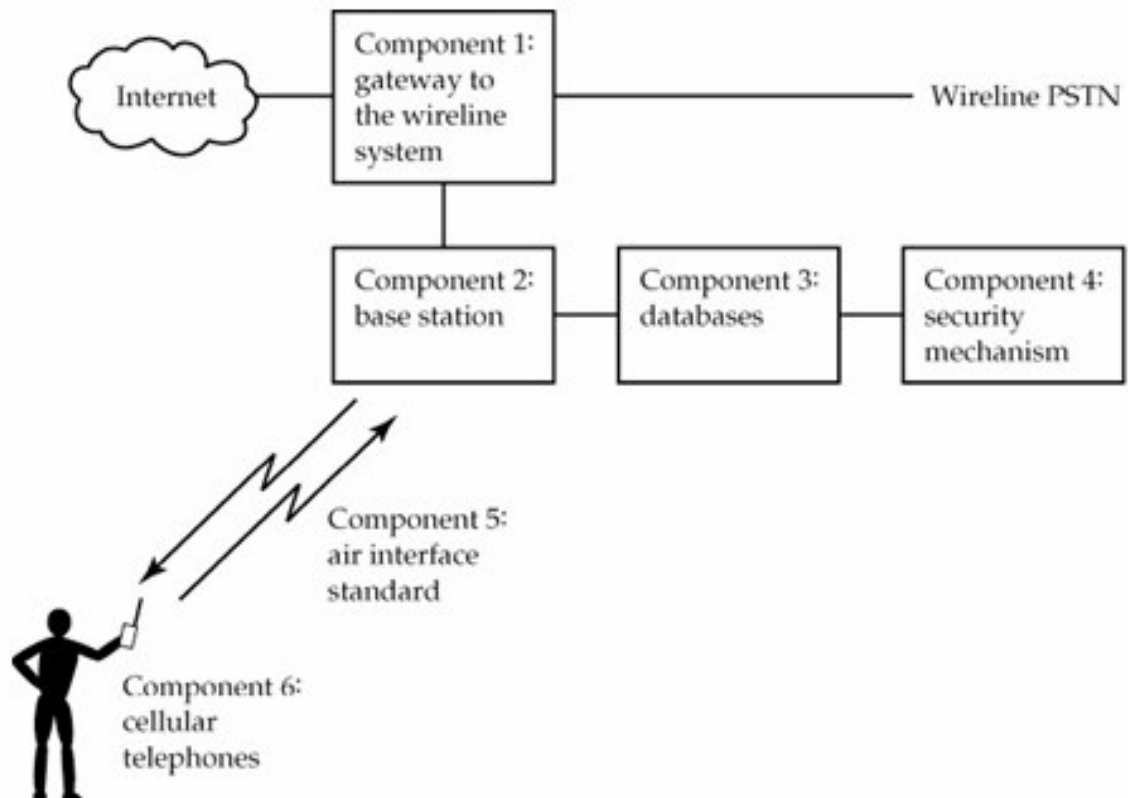

Basic Cellular Concept

- "Cell"
 - Typically, cells are hexagonal
 - In practice, it depends on available cell sites and radio propagation conditions
- Spectrum reuse
 - Reuse the same EM spectrum in other geographical location
 - Frequency reuse factor




Frequency Reuse

- Cluster
 - A group of cells
- Frequency reuse factor
 - $(\text{Total \# of channels in a cluster}) / (\text{Total \# of channels in a cell})$


Clusters

Clusters:

- Number of BSs comprised in a circle of diameter D
- Number of BSs whose inter-distance is lower than D

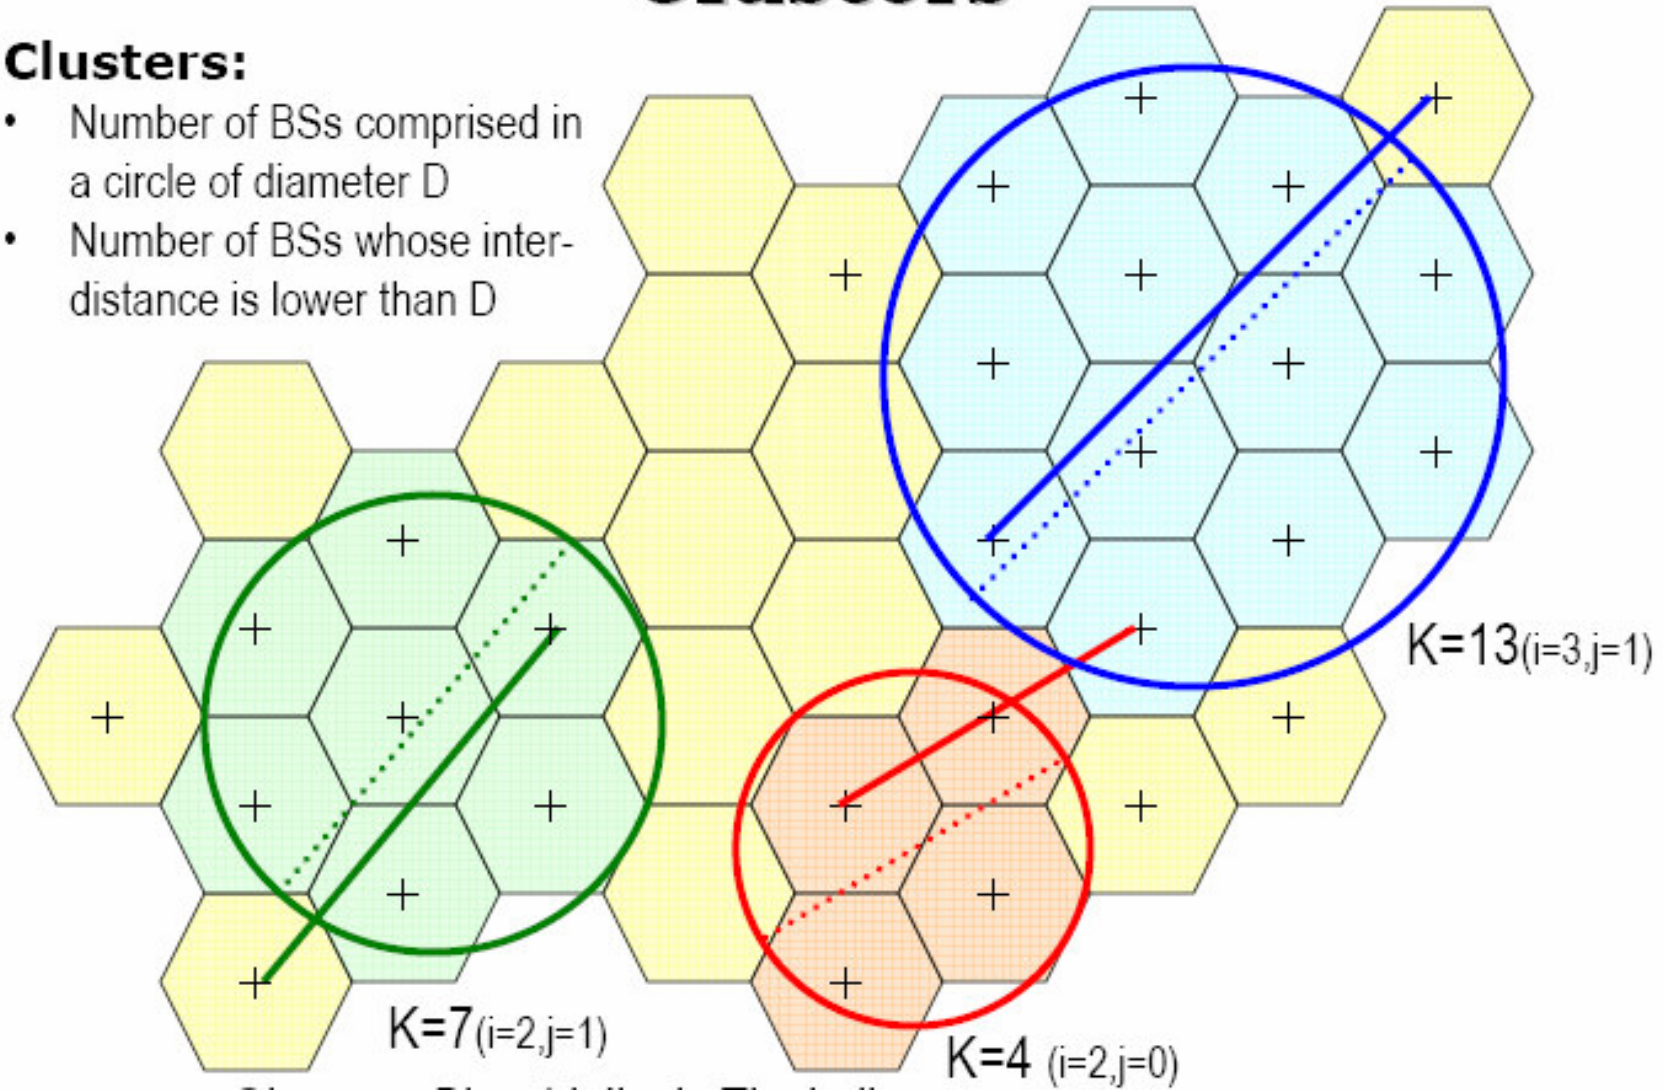


Coverage for a terrestrial zone

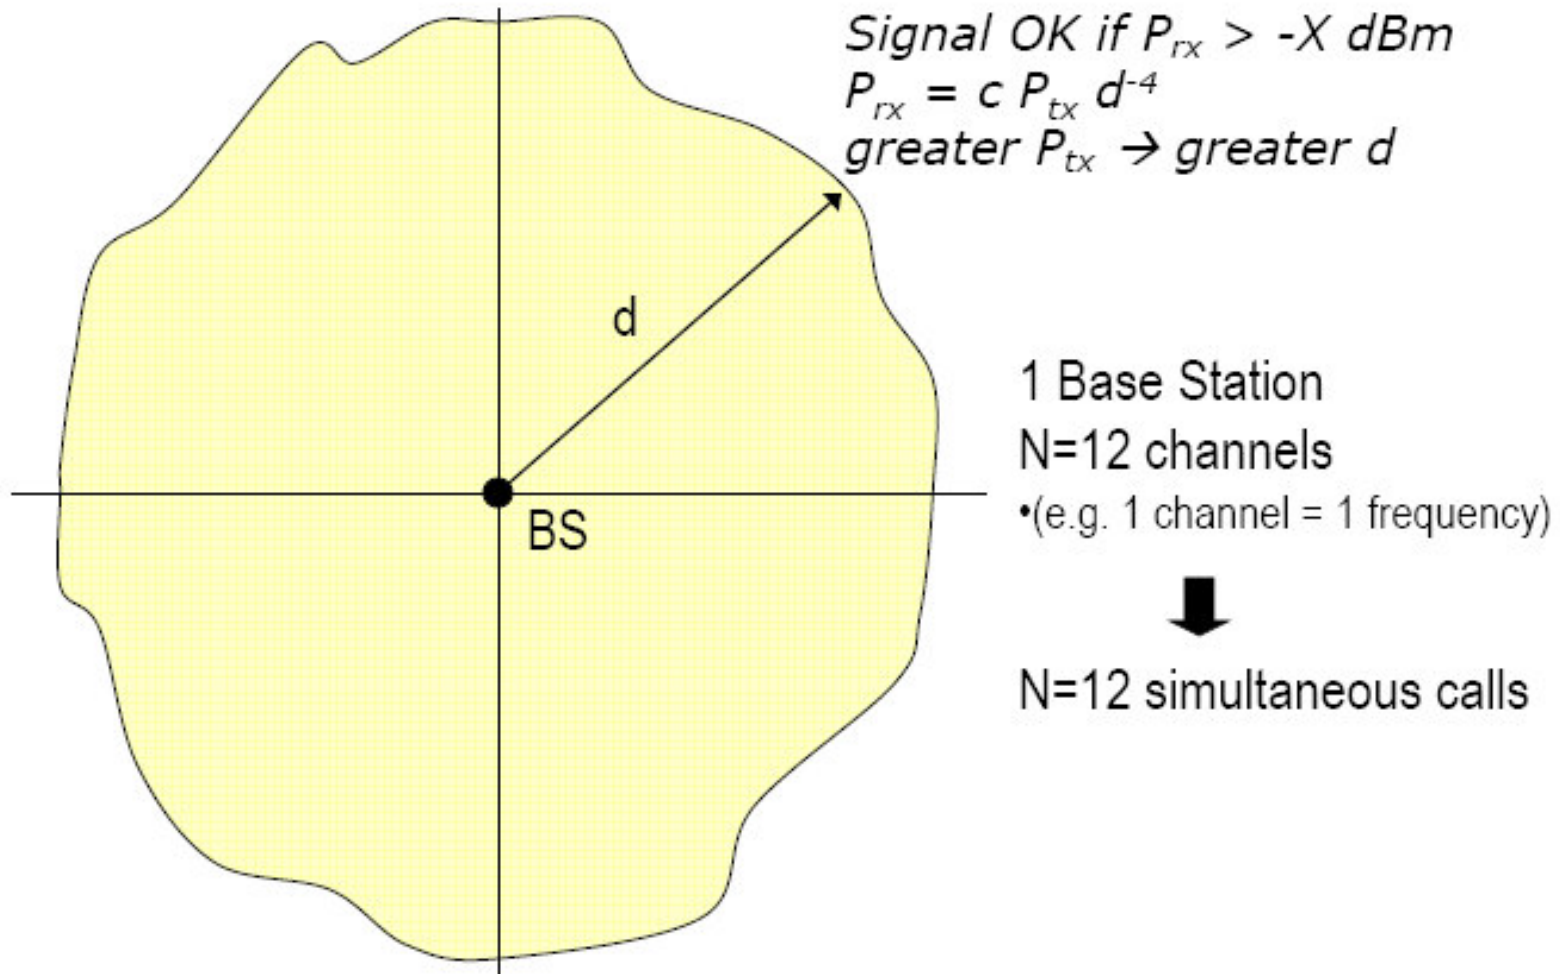

Cellular coverage

target: cover the same area with a larger number of BSs

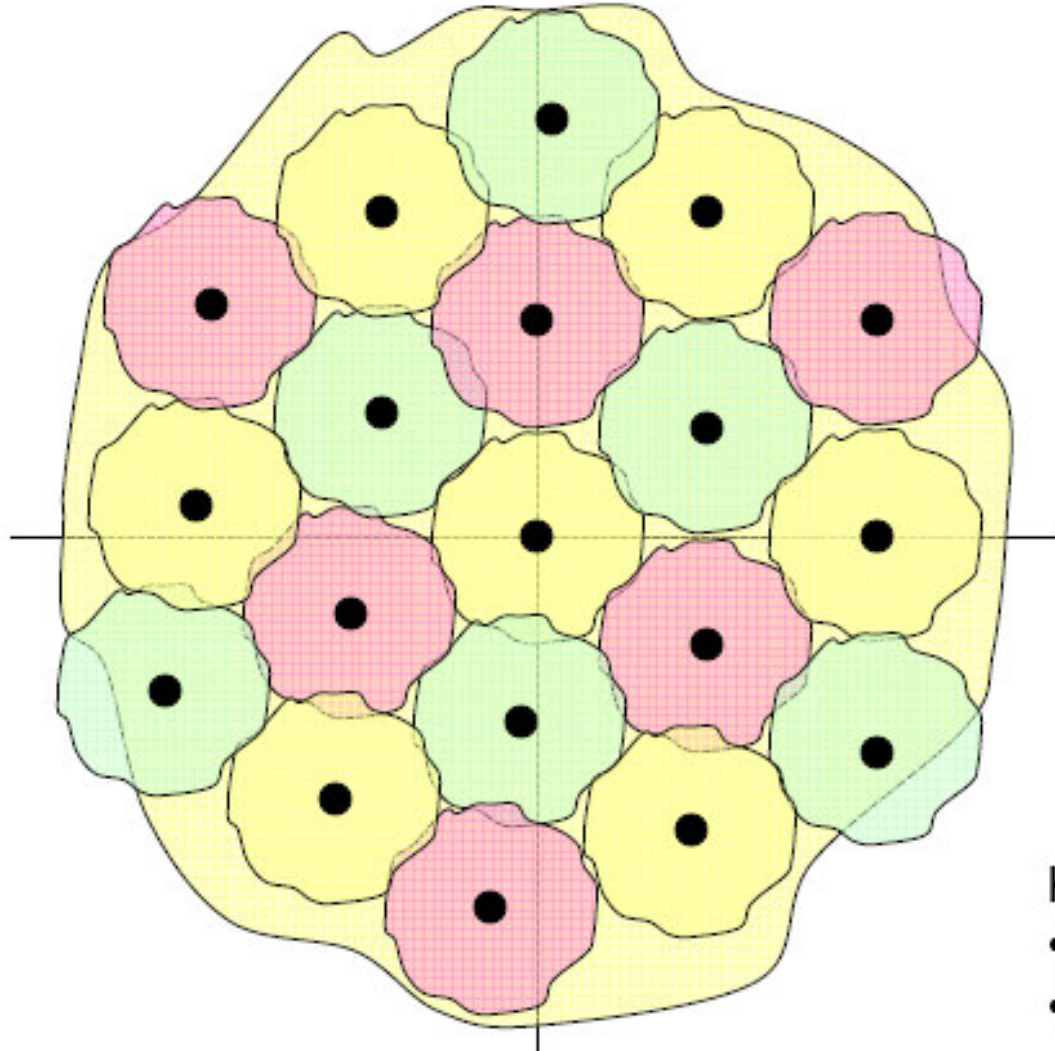

19 Base Station
12 frequencies
4 frequencies/cell



Worst case:

4 calls (all users in same cell)

Best case:

76 calls (4 users per cell)


Average case $\gg 12$

Low transmit power

Key advantages:

- Increased capacity (freq. reuse)
- Decreased tx power

Cellular coverage (microcells)

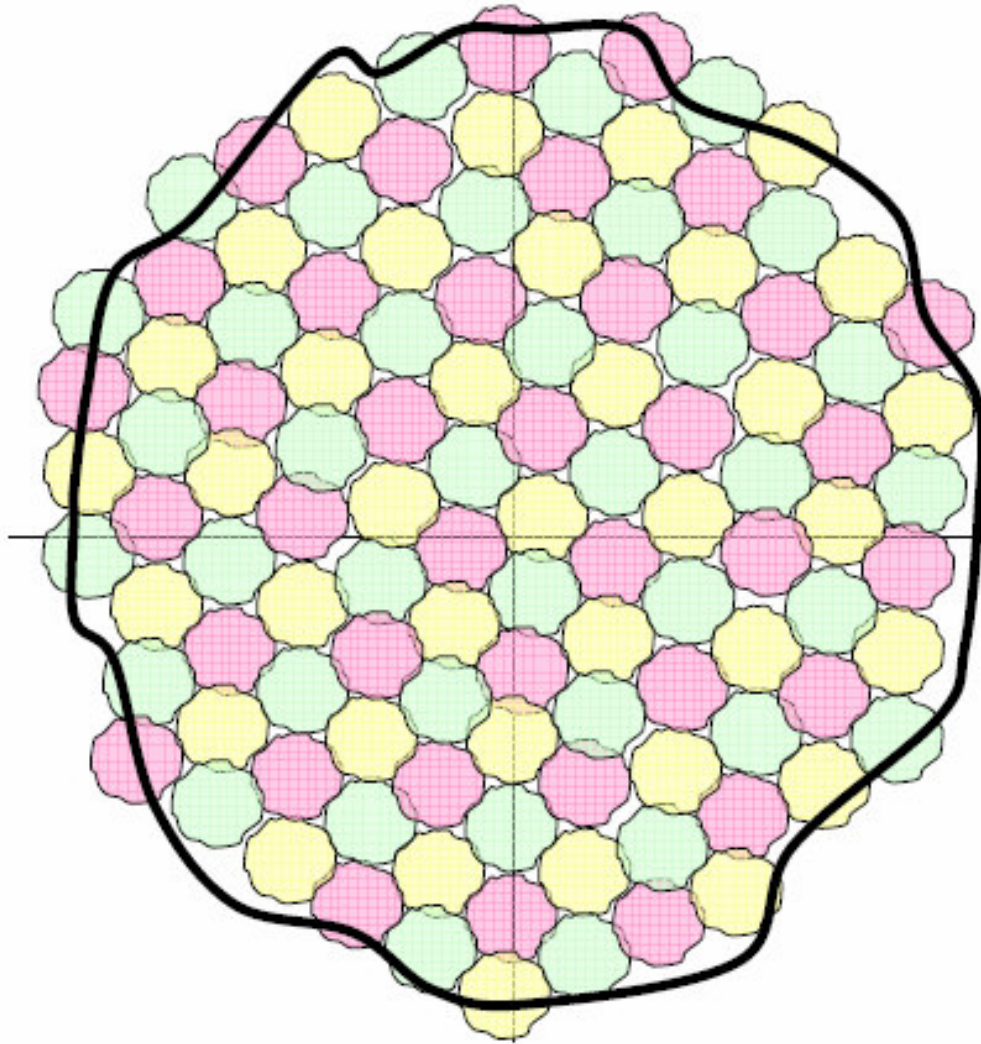

many BS

Very low power!!

Unlimited capacity!!

Usage of same spectrum


(12 frequencies)

(4 freq/cell)


Disadvantage:

mobility management

Cellular Geometries

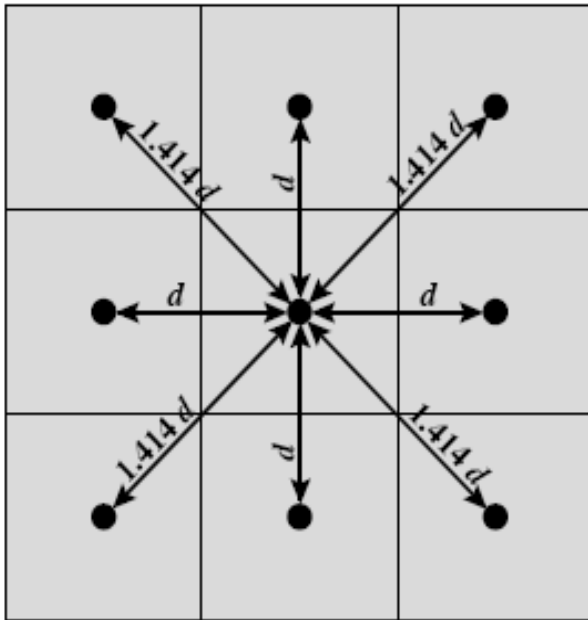

(a) Square pattern

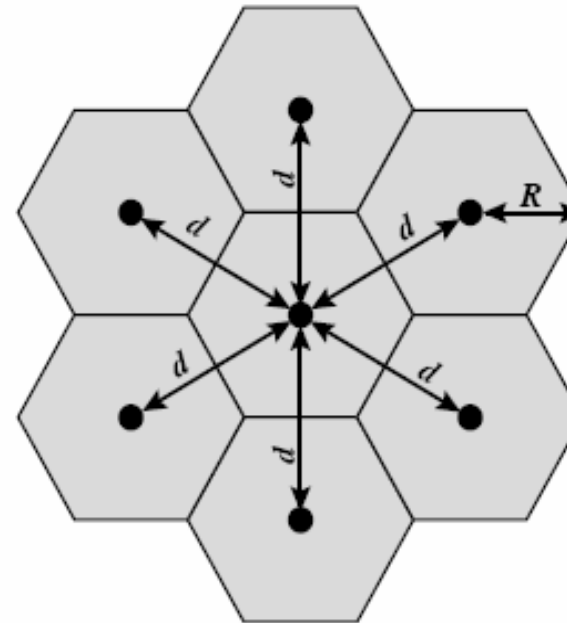


(b) Hexagonal pattern

A frequency reuse example

- Example

- Frequency reuse factor = 7
- Cluster size = 7

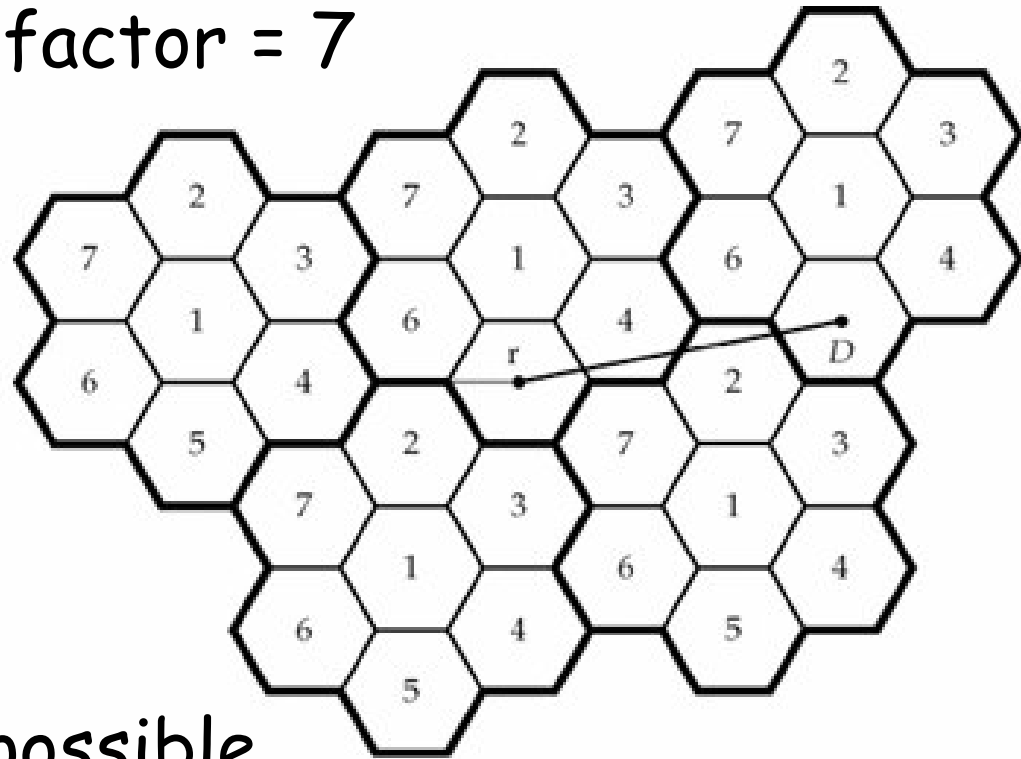

- Question


- What are other possible frequency reuse patterns?

Cluster



- The hexagon is an ideal choice for macrocellular coverage areas, because it closely approximates a circle and offers a wide range of tessellating reuse cluster sizes.
- A cluster of size N can be constructed if,
 - $N = i^2 + ij + j^2$.
 - i, j are positive integer
- Allowable cluster sizes are
 - $N = 1, 3, 4, 7, 9, 12, \dots$

$$N = I^2 + IJ + J^2$$

$$N = (2)^2 + (2)(1) + (1)^2 = 7$$

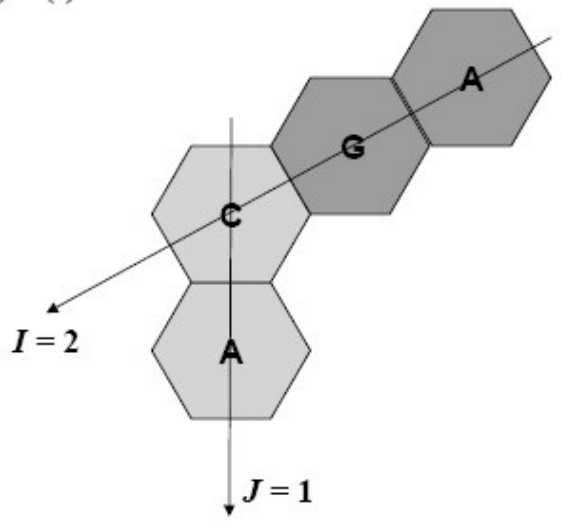

For $N = 3$ we have:

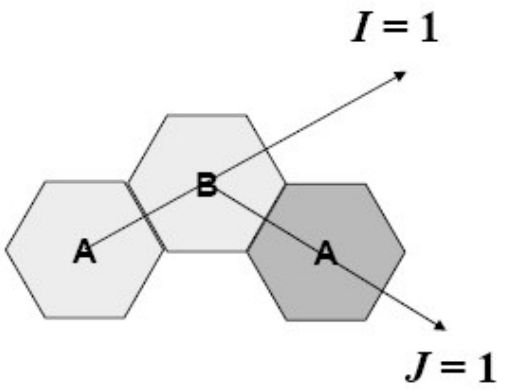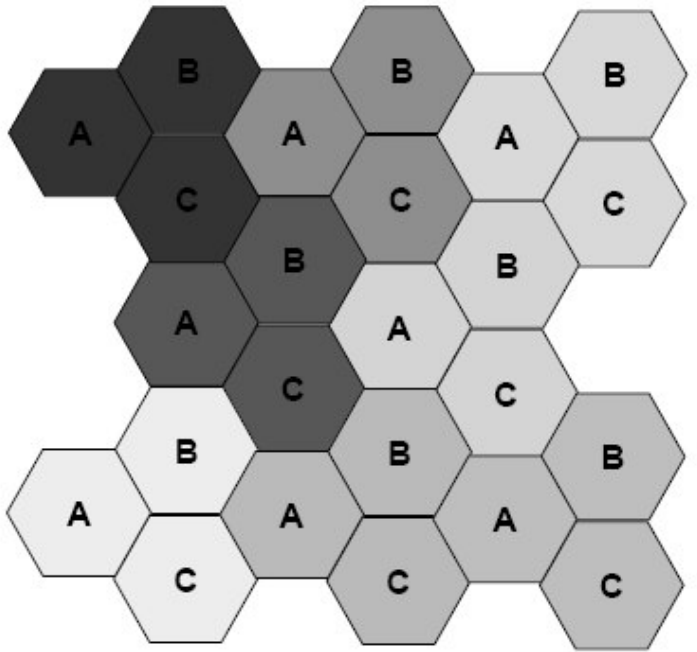


$$N = I^2 + IJ + J^2$$

$$N = (1)^2 + (1)(1) + (1)^2 = 3$$

Example: N=7

- Frequency reuse factor N=7
 - $N = i^2 + ij + j^2$
 - $(i,j)=(1,2)$ or $(2,1)$
- Other commonly used patterns
 - N=3
 - (1,1)
 - N=4
 - (2,0); (0,2)
- N=1 is possible
 - CDMA

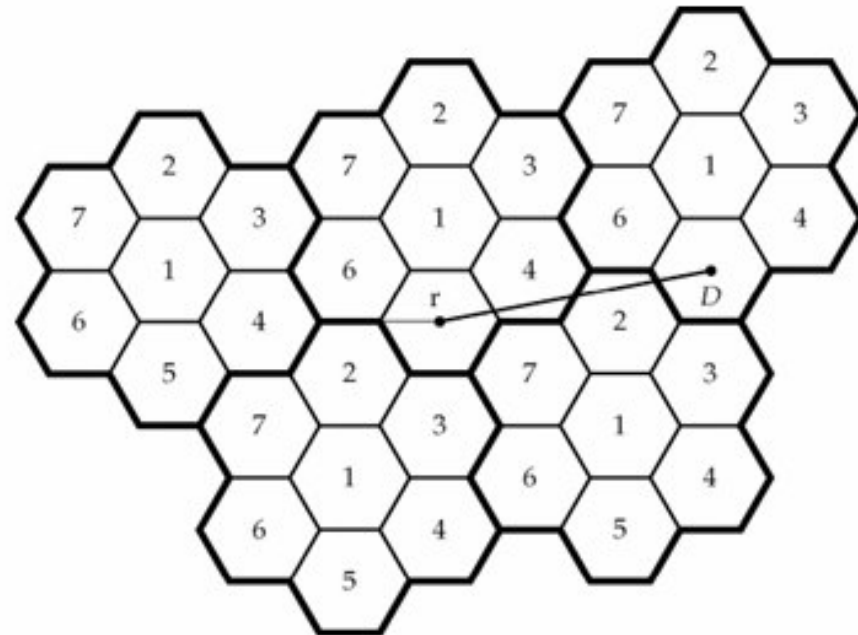

Reuse distance

- Notations

- D : Reuse distance

- Distance to cell using the same frequency

- r : Cell radius



- N : Frequency reuse factor

- Relationship between D and r

- $D/r = (3N)^{0.5}$


- $N = i^2 + ij + j^2$

For a hexagon we can define both an inner radius and an outer radius. Both are useful.

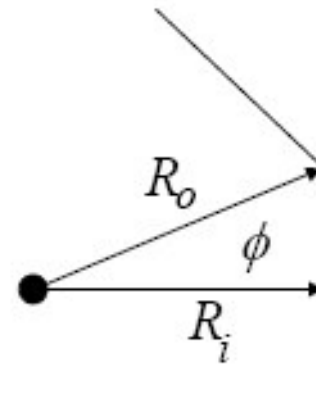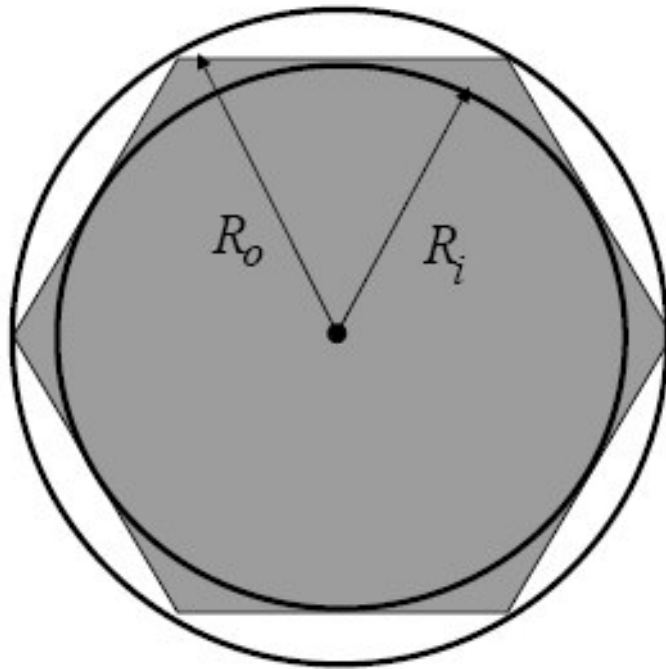

$$R_i = R_o \cos \phi = R_o \cos \frac{2\pi}{12} = R_o \frac{\sqrt{3}}{2}$$

Note that a hexagon has 6 faces or, equivalently, 12 “half-faces.”

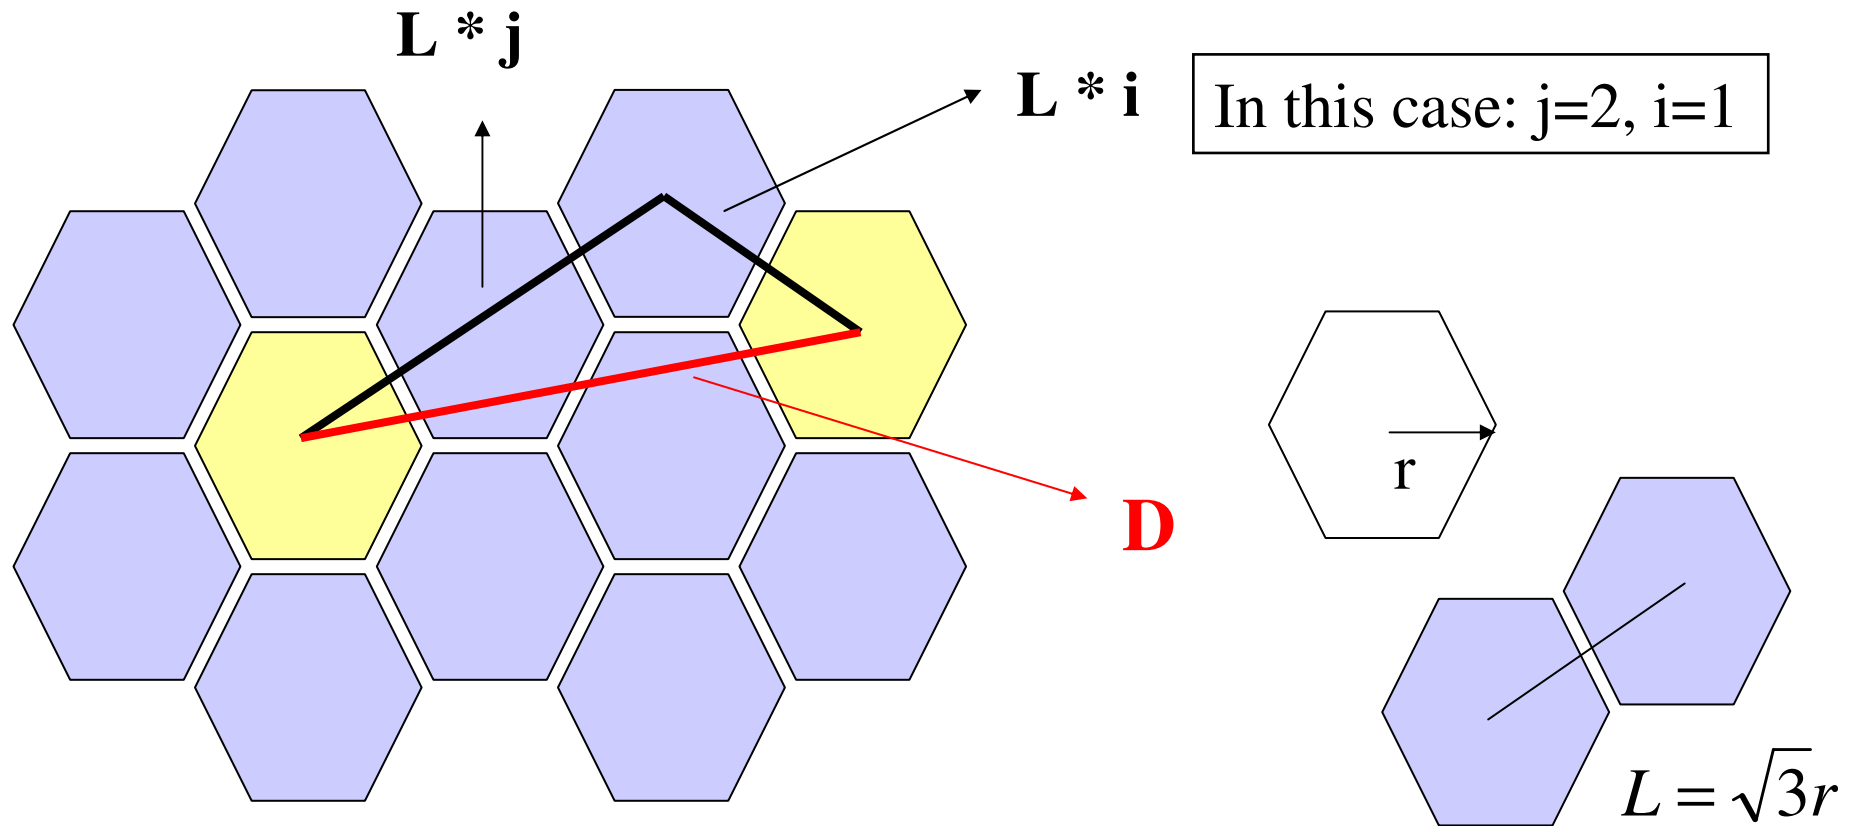

$$D^2 = (L \cdot i)^2 + (L \cdot j)^2 - 2(L \cdot i)(L \cdot j) \cos(2\pi / 3)$$

$$D^2 = L^2 \cdot i^2 + L^2 \cdot j^2 - 2L^2 \cdot i \cdot j \cdot (-0.5)$$

$$D^2 = L^2 (i^2 + j^2 + ij)$$

$$D / r = \sqrt{3(i^2 + j^2 + ij)} = \sqrt{3N}$$

Compute D based on
“law of cosine”

Reuse distance

→ General formula

$$D = R\sqrt{3K}$$

→ Valid for hexagonal geometry

→ D = reuse distance

→ R = cell radius

→ $q = D/R$ = frequency reuse factor

K	$q=D/R$
3	3,00
4	3,46
7	4,58
9	5,20
12	6,00
13	6,24

Possible clusters

all integer i,j values


i	j	$K=ii+jj+ij$	$q=D/R$
1	0	1	1,73
1	1	3	3,00
2	0	4	3,46
2	1	7	4,58
2	2	12	6,00
3	0	9	5,20
3	1	13	6,24
3	2	19	7,55
3	3	27	9,00
4	0	16	6,93
4	1	21	7,94
4	2	28	9,17
4	3	37	10,54
4	4	48	12,00
5	0	25	8,66
5	1	31	9,64

Determine frequency reuse pattern

- Co-channel interference [CCI]
 - one of the major factors that limits cellular system capacity
 - CCI arises when the same carrier frequency is used in different cells.
- Determine frequency reuse factor
 - Propagation model
 - Sensitivity to CCI

Compute total system capacity

- Example
 - Total coverage area = 100 mile² = 262.4 km²
 - Total 1000, 1256 duplex channels
 - Cell radius = 1km , 0.5km
 - N=4 or N=7
- What's the total system capacity for N=4 and N=7?

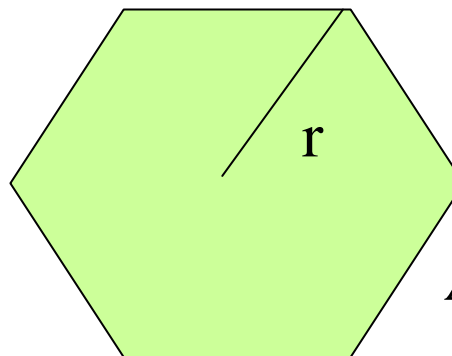

$$A = \frac{3\sqrt{3}}{2} r^2 = 2.6r^2$$

Compute total system capacity

- # of cells = $262.4/2.6=100$ cells
- # of usable duplex channels/cell
 - $S=(\# \text{ of channels})/(\text{reuse factor})$
 - $S_4=1000/4=250$
 - $S_7=1000/7=142$
- Total system capacity (# of users could be accommodated simultaneously)
 - $C=S*(\# \text{ of cells})$
 - $C_4=250*100=25000$
 - $C_7=142*100=14200$

Cellular concepts

- W - total available spectrum, B - bandwidth per user, N is the frequency reuse factor, m - number of cells, number of simultaneous users is given by $n = (m/B)*(W/N)$
- # of users can be increased by
 - Increasing m (cells)
 - Decreasing cluster size (N)
- A small cell size
 - Results in longer battery life
 - Reduces handset size
 - Increases handoffs
 - Increases signaling load
 - Increases the complexity of design and network deployment

Practical deployment issues


- Location to setup antenna
 - Antenna towers are expensive
 - Local people do not like BSs
 - Antenna/BS does not look like antenna/BS
- Antenna
 - Omni-directional
 - Directional antenna

Worst-Case CCI on the Forward Channel

- Co channel interference [CCI] is one of the prime limitations on system capacity. We use the propagation model to calculate CCI.
- There are six first-tier, co-channel BSs, two each at (approximate) distances of $D-R$, D , and $R+D$ and the worst case (average) Carrier-to-(Co-Channel) Interference [CCI] is

$$\Lambda = \frac{1}{2} \frac{R^{-\beta}}{(D-R)^{-\beta} + D^{-\beta} + (D+R)^{-\beta}}$$


**Worst case CCI
on the forward channel**

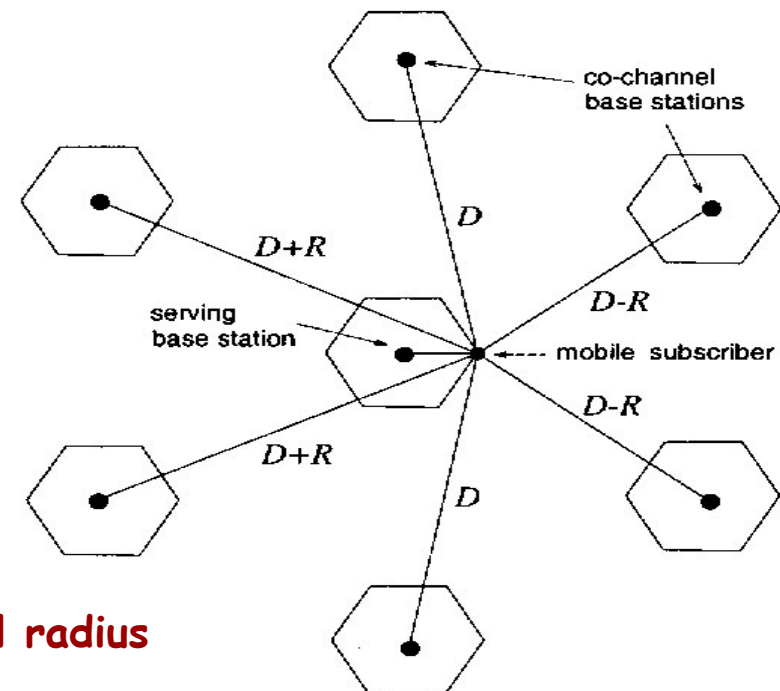

R= cell radius

Cell splitting

- Smaller cells have greater system capacity
 - Better spatial reuse
- As traffic load grows, larger cells could split into smaller cells

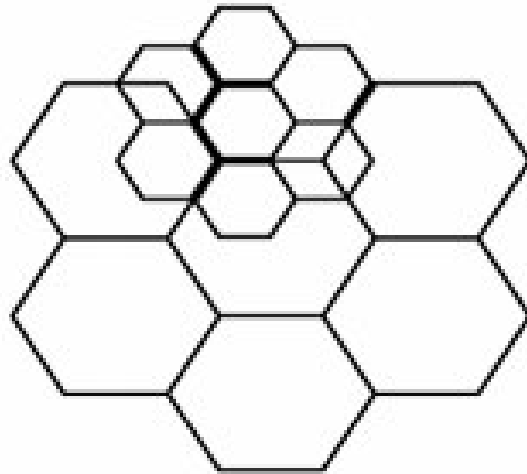

Cell splitting is the technique of splitting a congested cell into smaller cells.

- New (smaller cells) have their own base stations with reduced antenna height and reduced power.
- Cell splitting increases capacity since frequency reuse can be increased.
- Cell splitting preserves the geometry of the architecture and therefore simply scales the geometry of the architecture.
- In the following figure the cell radius has been reduced by half.

the simple propagation model

$$P_R = P_o \left(\frac{d}{d_o} \right)^{-n}$$

At the cell boundary the distance d is R , the unsplit cell radius. Consider both an unsplit and a split scenario. For the unsplit case


$$P_{r(\text{unsplit})} = P_{t,\text{unsplit}} R^{-n}$$

For the split case

$$P_{r(\text{split})} = P_{t,\text{split}} \left(\frac{R}{2} \right)^{-n}$$

or

$$P_{r,\text{split}} = P_{t,\text{split}} R^{-n} 2^n$$

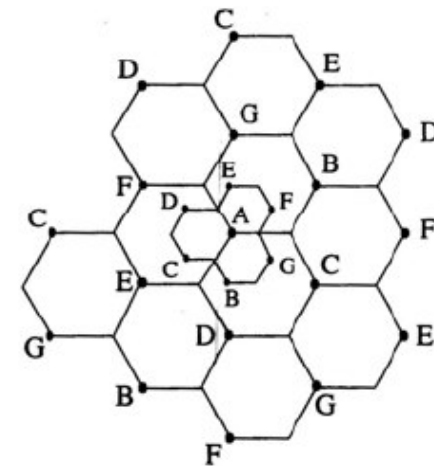

For the received signal powers to be equal we must have

$$P_{t,unsplit}R^{-n} = P_{t,split}R^{-n}2^n$$

The ratio of transmitted powers is important. Consider the following:

$$\frac{P_{t,split}}{P_{t,unsplit}} = 2^{-n}$$

Note the role of the path loss exponent. For $n = 4$, the transmitted can be reduced by a factor of 16 and still provide equal received signal powers.